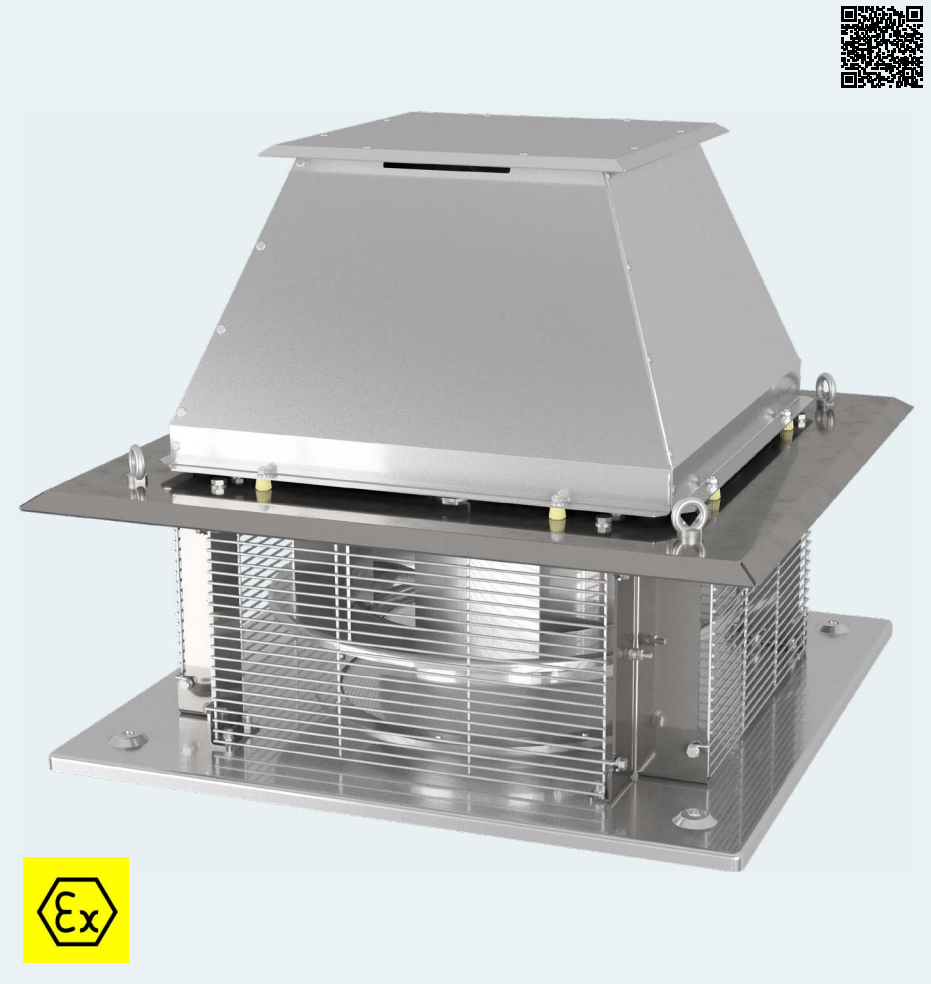











Application

Extraction roof fans REX comply with the requirements of ATEX Directive 2014/34/UE, are designed for use in hazard zones excluding mines and mining pits, meets the requirements of group II category 2G/3G – zone 1 and/or 2 and category 2D/3D – zone 21 and/or 22.

ATEX marking:
II 2G Ex h IIB+H_2 T3 Gb
II 2G Ex h IIB+H_2 T4 Gb
II 2D Ex h IIIC T125°C Db

Construction

- medium- pressure centrifugal fan with direct drive,
- aluminium sheet impeller with forward curved blades, dynamically balanced according to ISO 1940-1,
- casing parts made of unpainted aluminium and stainless steel sheet,
- maximum temperature range of the transported medium is from -20°C to +60°C,
- minimum ambient temperature is -20°C,
- suitable for mounting a vibration sensor.

Electric motor

- asynchronous, three-phase, 230/400V 50Hz or 400/690V 50Hz (depending on the model),
- insulation class F,
- thermal protection PTC,
- VFD models suitable for frequency regulation.

Special execution

- painted casing,
- different motor voltage and frequency,
- different motor degree of protection,
- impeller and casing made of stainless steel sheet,
- ambient temperature up to +60°C.

RELATED PRODUCTS

REX-V
Roof fan with vertical discharge

NOMINAL DATA

type	airflow max	pressure max	speed	voltage rated	current max abs.**	power motor	sound pressure level*	temp. medium min / max	temp. ambient min / max	weight	article number
2-POLE MOTORS											
REX-H/2-190-012T 2G	750 m³/h	350 Pa	2 750 rpm	400 V	0,4 A	120 W	68 dB(A)	-20 / 60 °C	-20 / 40 °C	12,0 kg	425527200
REX-H/2-190-012T 2G VFD	750 m³/h	350 Pa	2 800 rpm	400 V	0,48 A	120 W	68 dB(A)	-20 / 60 °C	-20 / 50 °C	14,0 kg	425527201
REX-H/2-190-012T 2GD VFD	750 m³/h	350 Pa	2 800 rpm	400 V	0,48 A	120 W	68 dB(A)	-20 / 60 °C	-20 / 50 °C	14,0 kg	425527202
REX-H/2-220-018T 2G	1 050 m³/h	450 Pa	2 820 rpm	400 V	0,6 A	180 W	69 dB(A)	-20 / 60 °C	-20 / 40 °C	12,0 kg	425527210-01
REX-H/2-220-018T 2G VFD	1 050 m³/h	450 Pa	2 800 rpm	400 V	0,58 A	180 W	69 dB(A)	-20 / 60 °C	-20 / 50 °C	14,0 kg	425527211-01
REX-H/2-220-018T 2GD VFD	1 050 m³/h	450 Pa	2 800 rpm	400 V	0,58 A	180 W	69 dB(A)	-20 / 60 °C	-20 / 50 °C	14,0 kg	425527212-01
REX-H/2-280(250)-025T 2G	1 800 m³/h	650 Pa	2 870 rpm	400 V	0,9 A	250 W	72 dB(A)	-20 / 60 °C	-20 / 40 °C	15,0 kg	425527220
REX-H/2-280(250)-025T 2G VFD	1 800 m³/h	650 Pa	2 830 rpm	400 V	0,81 A	250 W	72 dB(A)	-20 / 60 °C	-20 / 50 °C	17,0 kg	425527221
REX-H/2-280(250)-025T 2GD VFD	1 800 m³/h	650 Pa	2 830 rpm	400 V	0,81 A	250 W	72 dB(A)	-20 / 60 °C	-20 / 50 °C	17,0 kg	425527222
4-POLE MOTORS											
REX-H/4-190-006T 2G	370 m³/h	85 Pa	1 380 rpm	400 V	0,31 A	60 W	53 dB(A)	-20 / 60 °C	-20 / 40 °C	12,0 kg	45527400
REX-H/4-190-012T 2G VFD	370 m³/h	85 Pa	1 390 rpm	400 V	0,49 A	120 W	53 dB(A)	-20 / 60 °C	-20 / 50 °C	14,5 kg	425527401
REX-H/4-190-012T 2GD VFD	370 m³/h	85 Pa	1 390 rpm	400 V	0,49 A	120 W	53 dB(A)	-20 / 60 °C	-20 / 50 °C	14,5 kg	425527402
REX-H/4-220-006T 2G	515 m³/h	110 Pa	1 380 rpm	400 V	0,31 A	60 W	54 dB(A)	-20 / 60 °C	-20 / 40 °C	12,0 kg	45527410
REX-H/4-220-012T 2G VFD	515 m³/h	110 Pa	1 390 rpm	400 V	0,49 A	120 W	54 dB(A)	-20 / 60 °C	-20 / 50 °C	14,5 kg	425527411
REX-H/4-220-012T 2GD VFD	515 m³/h	110 Pa	1 390 rpm	400 V	0,49 A	120 W	54 dB(A)	-20 / 60 °C	-20 / 50 °C	14,5 kg	425527412
REX-H/4-250-018T 2G	1 140 m³/h	185 Pa	1 380 rpm	400 V	0,55 A	180 W	54 dB(A)	-20 / 60 °C	-20 / 40 °C	16,0 kg	425527420
REX-H/4-250-018T 2G VFD	1 140 m³/h	185 Pa	1 340 rpm	400 V	0,57 A	180 W	54 dB(A)	-20 / 60 °C	-20 / 50 °C	17,0 kg	425527421
REX-H/4-250-018T 2GD VFD	1 140 m³/h	185 Pa	1 340 rpm	400 V	0,57 A	180 W	54 dB(A)	-20 / 60 °C	-20 / 50 °C	17,0 kg	425527422
REX-H/4-280-025T 2G	1 615 m³/h	235 Pa	1 410 rpm	400 V	0,85 A	250 W	57 dB(A)	-20 / 60 °C	-20 / 40 °C	17,0 kg	425527430
REX-H/4-280-025T 2G VFD	1 615 m³/h	235 Pa	1 430 rpm	400 V	0,79 A	250 W	57 dB(A)	-20 / 60 °C	-20 / 50 °C	19,0 kg	425527431
REX-H/4-280-025T 2GD VFD	1 615 m³/h	235 Pa	1 430 rpm	400 V	0,79 A	250 W	57 dB(A)	-20 / 60 °C	-20 / 50 °C	19,0 kg	425527432
REX-H/4-315-037T 2G	2 280 m³/h	300 Pa	1 410 rpm	400 V	1,15 A	370 W	60 dB(A)	-20 / 60 °C	-20 / 40 °C	23,0 kg	425527440
REX-H/4-315-037T 2G VFD	2 280 m³/h	300 Pa	1 420 rpm	400 V	1,08 A	370 W	60 dB(A)	-20 / 60 °C	-20 / 50 °C	24,0 kg	425527441
REX-H/4-315-037T 2GD VFD	2 280 m³/h	300 Pa	1 420 rpm	400 V	1,08 A	370 W	60 dB(A)	-20 / 60 °C	-20 / 50 °C	23,0 kg	425527442
REX-H/4-355-055T 2G	3 230 m³/h	385 Pa	1 420 rpm	400 V	1,5 A	550 W	63 dB(A)	-20 / 60 °C	-20 / 40 °C	30,5 kg	425527450
REX-H/4-355-055T 2G VFD	3 230 m³/h	385 Pa	1 440 rpm	400 V	1,32 A	550 W	63 dB(A)	-20 / 60 °C	-20 / 50 °C	33,0 kg	425527451
REX-H/4-355-055T 2GD VFD	3 230 m³/h	385 Pa	1 440 rpm	400 V	1,32 A	550 W	63 dB(A)	-20 / 60 °C	-20 / 50 °C	33,0 kg	425527452
REX-H/4-400-075T 2G	4 750 m³/h	490 Pa	1 430 rpm	400 V	2,1 A	750 W	66 dB(A)	-20 / 60 °C	-20 / 40 °C	38,0 kg	435527460
REX-H/4-400-075T 2G VFD	4 750 m³/h	490 Pa	1 445 rpm	400 V	1,85 A	750 W	66 dB(A)	-20 / 60 °C	-20 / 50 °C	42,0 kg	435527461
REX-H/4-400-075T 2GD VFD	4 750 m³/h	490 Pa	1 445 rpm	400 V	1,85 A	750 W	66 dB(A)	-20 / 60 °C	-20 / 50 °C	42,0 kg	435527462
REX-H/4-450-110T 2G	6 745 m³/h	640 Pa	1 450 rpm	400 V	2,5 A	1100 W	69 dB(A)	-20 / 60 °C	-20 / 40 °C	49,0 kg	435527470
REX-H/4-450-110T 2G VFD	6 745 m³/h	640 Pa	1 440 rpm	400 V	2,61 A	1100 W	69 dB(A)	-20 / 60 °C	-20 / 50 °C	52,0 kg	435527471
REX-H/4-450-110T 2GD VFD	6 745 m³/h	640 Pa	1 440 rpm	400 V	2,61 A	1100 W	69 dB(A)	-20 / 60 °C	-20 / 50 °C	52,0 kg	435527472
REX-H/4-500-220T 2G	9 215 m³/h	765 Pa	1 465 rpm	400 V	4,6 A	2200 W	72 dB(A)	-20 / 60 °C	-20 / 40 °C	64,5 kg	435527480
REX-H/4-500-220T 2G VFD	9 215 m³/h	765 Pa	1 440 rpm	400 V	4,9 A	2200 W	72 dB(A)	-20 / 60 °C	-20 / 50 °C	68,5 kg	435527481
REX-H/4-500-220T 2GD VFD	9 215 m³/h	765 Pa	1 440 rpm	400 V	4,9 A	2200 W	72 dB(A)	-20 / 60 °C	-20 / 50 °C	68,5 kg	435527482
REX-H/4-560-300T 2G	12 900 m³/h	950 Pa	1 465 rpm	400 V	6,3 A	3000 W	76 dB(A)	-20 / 60 °C	-20 / 40 °C	74,0 kg	435527490
REX-H/4-560-300T 2G VFD	12 900 m³/h	950 Pa	1 455 rpm	400 V	6,05 A	3000 W	76 dB(A)	-20 / 60 °C	-20 / 50 °C	84,0 kg	435527491
REX-H/4-560-300T 2GD VFD	12 900 m³/h	950 Pa	1 455 rpm	400 V	6,05 A	3000 W	76 dB(A)	-20 / 60 °C	-20 / 50 °C	84,0 kg	435527492

* Measurement made at a distance of 1.5m from the outlet, for Q = 2/3 * Qmax

** the value of the rated current may vary depending on the manufacturer of the electric motor used.

NOMINAL DATA

type	airflow max	pressure max	speed	voltage rated	current max abs.**	power motor	sound pressure level*	temp. medium min / max	temp. ambient min / max	weight	article number
					6-POLE MOTORS						
REX-H/6-250-018T 2G	750 m³/h	80 Pa	910 rpm	400 V	0,65 A	180 W	51 dB(A)	-20 / 60 °C	-20 / 40 °C	16,5 kg	425527620
REX-H/6-250-012T 2G VFD	750 m³/h	80 Pa	935 rpm	400 V	0,59 A	120 W	51 dB(A)	-20 / 60 °C	-20 / 50 °C	18,0 kg	425527621
REX-H/6-250-012T 2GD VFD	750 m³/h	80 Pa	935 rpm	400 V	0,59 A	120 W	51 dB(A)	-20 / 60 °C	-20 / 50 °C	18,0 kg	425527622
REX-H/6-280-018T 2G	1 060 m³/h	100 Pa	910 rpm	400 V	0,65 A	180 W	54 dB(A)	-20 / 60 °C	-20 / 40 °C	17,0 kg	425527630
REX-H/6-280-012T 2G VFD	1 060 m³/h	100 Pa	935 rpm	400 V	0,59 A	120 W	54 dB(A)	-20 / 60 °C	-20 / 50 °C	18,0 kg	425527631
REX-H/6-280-012T 2GD VFD	1 060 m³/h	100 Pa	935 rpm	400 V	0,59 A	120 W	54 dB(A)	-20 / 60 °C	-20 / 50 °C	18,0 kg	425527632
REX-H/6-315-018T 2G	1 500 m³/h	130 Pa	910 rpm	400 V	0,65 A	180 W	57 dB(A)	-20 / 60 °C	-20 / 40 °C	22,0 kg	425527640
REX-H/6-315-012T 2G VFD	1 500 m³/h	130 Pa	935 rpm	400 V	0,59 A	120 W	57 dB(A)	-20 / 60 °C	-20 / 50 °C	23,0 kg	425527641
REX-H/6-315-012T 2GD VFD	1 500 m³/h	130 Pa	935 rpm	400 V	0,59 A	120 W	57 dB(A)	-20 / 60 °C	-20 / 50 °C	23,0 kg	425527642
REX-H/6-355-018T 2G	2 115 m³/h	165 Pa	910 rpm	400 V	0,65 A	180 W	60 dB(A)	-20 / 60 °C	-20 / 40 °C	28,0 kg	425527650
REX-H/6-355-018T 2G VFD	2 115 m³/h	165 Pa	925 rpm	400 V	0,82 A	180 W	60 dB(A)	-20 / 60 °C	-20 / 50 °C	30,0 kg	425527651
REX-H/6-355-018T 2GD VFD	2 115 m³/h	165 Pa	925 rpm	400 V	0,82 A	180 W	60 dB(A)	-20 / 60 °C	-20 / 50 °C	30,0 kg	425527652
REX-H/6-400-025T 2G	3 110 m³/h	210 Pa	910 rpm	400 V	0,9 A	250 W	63 dB(A)	-20 / 60 °C	-20 / 40 °C	35,0 kg	425527660
REX-H/6-400-025T 2G VFD	3 110 m³/h	210 Pa	930 rpm	400 V	0,88 A	250 W	63 dB(A)	-20 / 60 °C	-20 / 50 °C	37,0 kg	425527661
REX-H/6-400-025T 2GD VFD	3 110 m³/h	210 Pa	930 rpm	400 V	0,88 A	250 W	63 dB(A)	-20 / 60 °C	-20 / 50 °C	37,0 kg	425527662
REX-H/6-450-037T 2G	4 420 m³/h	275 Pa	920 rpm	400 V	1 A	370 W	66 dB(A)	-20 / 60 °C	-20 / 40 °C	44,0 kg	425527670
REX-H/6-450-037T 2G VFD	4 420 m³/h	275 Pa	945 rpm	400 V	1,05 A	370 W	66 dB(A)	-20 / 60 °C	-20 / 50 °C	47,0 kg	425527671
REX-H/6-450-037T 2GD VFD	4 420 m³/h	275 Pa	945 rpm	400 V	1,05 A	370 W	66 dB(A)	-20 / 60 °C	-20 / 50 °C	47,0 kg	425527672
REX-H/6-500-075T 2G	6 030 m³/h	330 Pa	940 rpm	400 V	2 A	750 W	69 dB(A)	-20 / 60 °C	-20 / 40 °C	60,0 kg	435527680
REX-H/6-500-075T 2G VFD	6 030 m³/h	330 Pa	945 rpm	400 V	1,96 A	750 W	69 dB(A)	-20 / 60 °C	-20 / 50 °C	60,0 kg	435527681
REX-H/6-500-075T 2GD VFD	6 030 m³/h	330 Pa	945 rpm	400 V	1,96 A	750 W	69 dB(A)	-20 / 60 °C	-20 / 50 °C	60,0 kg	435527682
REX-H/6-560-110T 2G	8 465 m³/h	410 Pa	940 rpm	400 V	2,8 A	1100 W	73 dB(A)	-20 / 60 °C	-20 / 40 °C	65,5 kg	435527690
REX-H/6-560-110T 2G VFD	8 465 m³/h	410 Pa	950 rpm	400 V	2,7 A	1100 W	73 dB(A)	-20 / 60 °C	-20 / 50 °C	72,0 kg	435527691
REX-H/6-560-110T 2GD VFD	8 465 m³/h	410 Pa	950 rpm	400 V	2,7 A	1100 W	73 dB(A)	-20 / 60 °C	-20 / 50 °C	72,0 kg	435527692
REX-H/6-630-220T 2G	12 250 m³/h	535 Pa	965 rpm	400 V	5 A	2200 W	77 dB(A)	-20 / 60 °C	-20 / 40 °C	111,0 kg	435527700
REX-H/6-630-220T 2G VFD	12 250 m³/h	535 Pa	955 rpm	400 V	5,2 A	2200 W	77 dB(A)	-20 / 60 °C	-20 / 50 °C	122,0 kg	435527701
REX-H/6-630-220T 2GD VFD	12 250 m³/h	535 Pa	955 rpm	400 V	5,2 A	2200 W	77 dB(A)	-20 / 60 °C	-20 / 50 °C	122,0 kg	435527702
REX-H/6-710-300T 2G	17 480 m³/h	680 Pa	965 rpm	400 V	6,2 A	3000 W	81 dB(A)	-20 / 60 °C	-20 / 40 °C	152,0 kg	435527710
REX-H/6-710-300T 2G VFD	17 480 m³/h	680 Pa	965 rpm	400 V	6,32 A	3000 W	81 dB(A)	-20 / 60 °C	-20 / 50 °C	147,0 kg	435527711
REX-H/6-710-300T 2GD VFD	17 480 m³/h	680 Pa	965 rpm	400 V	6,32 A	3000 W	81 dB(A)	-20 / 60 °C	-20 / 50 °C	147,0 kg	435527712
REX-H/6-800-550T 2G	26000 m³/h	900 Pa	960 rpm	400 V	11,1 A	5500 W	85 dB(A)	-20 / 60 °C	-20 / 40 °C	210,0 kg	435527720
REX-H/6-800-550T 2G VFD	26000 m³/h	900 Pa	970 rpm	400 V	11,4 A	5500 W	85 dB(A)	-20 / 60 °C	-20 / 50 °C	242,0 kg	435527721
REX-H/6-800-550T 2GD VFD	26000 m³/h	900 Pa	970 rpm	400 V	11,4 A	5500 W	85 dB(A)	-20 / 60 °C	-20 / 50 °C	242,0 kg	435527722

* Measurement made at a distance of 1.5m from the outlet, for Q = 2/3 * Qmax

** the value of the rated current may vary depending on the manufacturer of the electric motor used.

PERFORMANCE CHARACTERISTICS OF THE FANS - 2-POLE MOTORS 3000RPM

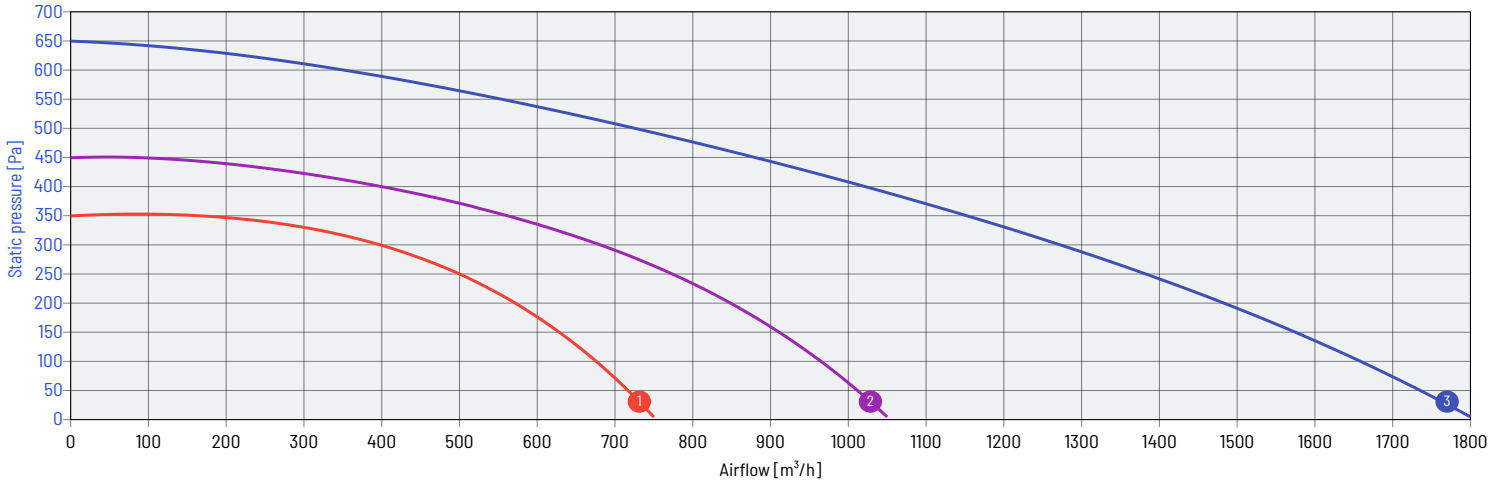

1 REX-H/2-190 2 REX-H/2-220 3 REX-H/2-280(250)

PERFORMANCE CHARACTERISTICS OF THE FANS - 4-POLE MOTORS 1500RPM

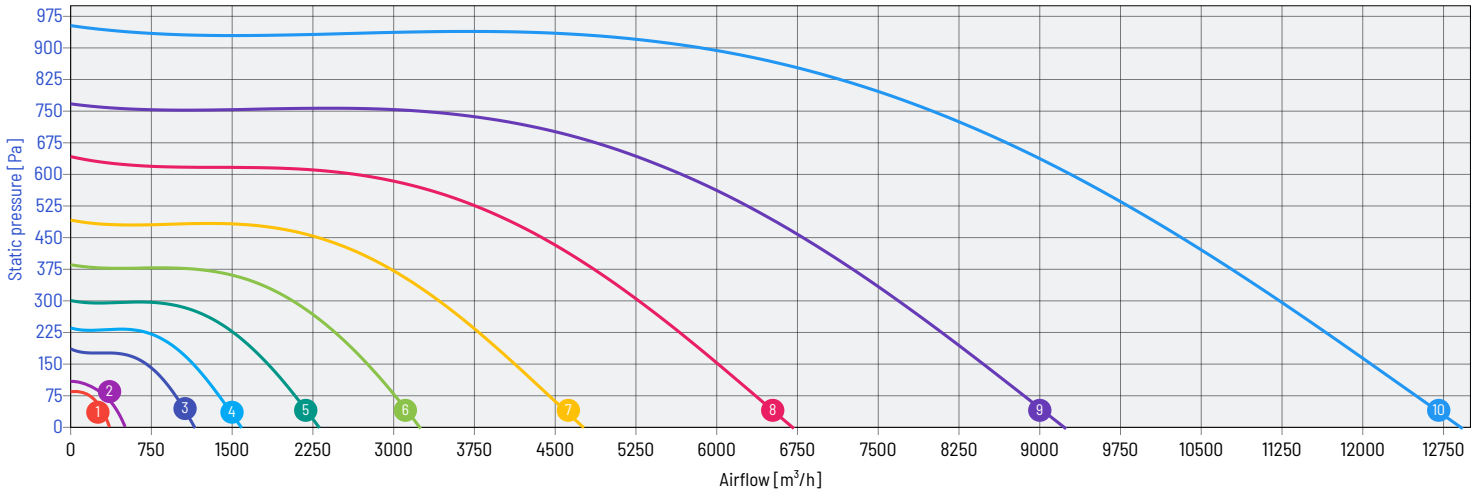

1 REX-H/4-190 2 REX-H/4-220 3 REX-H/4-250 4 REX-H/4-280 5 REX-H/4-315 6 REX-H/4-355
7 REX-H/4-400 8 REX-H/4-450 9 REX-H/4-500 10 REX-H/4-560

PERFORMANCE CHARACTERISTICS OF THE FANS - 6-POLE MOTORS 1000RPM

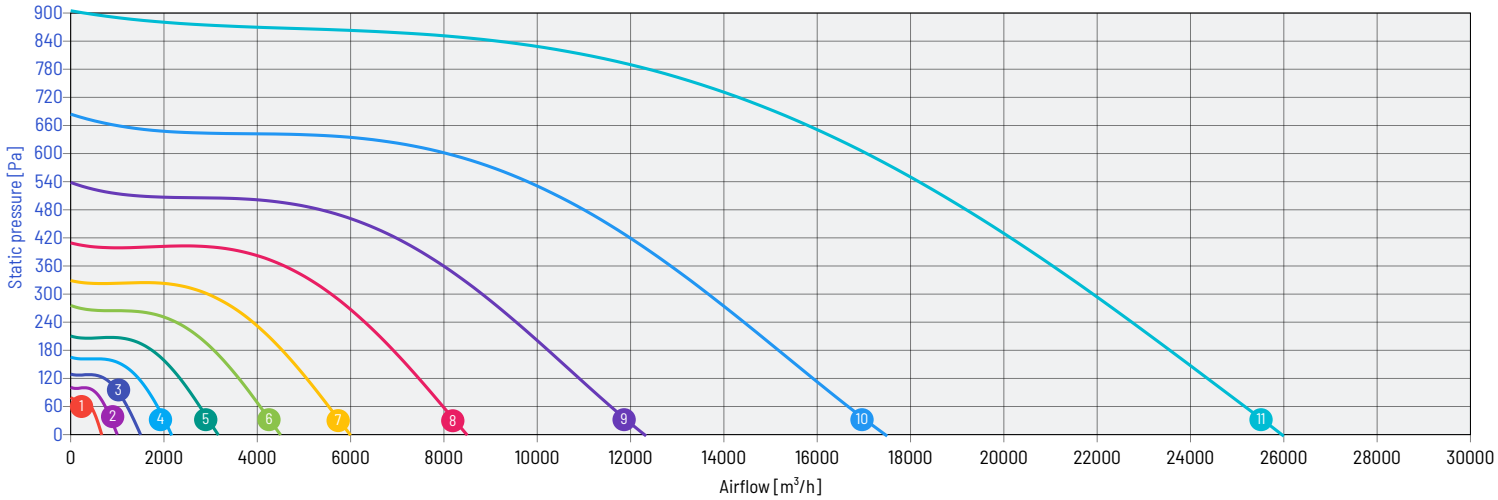

1 REX-H/6-250 2 REX-H/6-280 3 REX-H/6-315 4 REX-H/6-355 5 REX-H/6-400 6 REX-H/6-450
7 REX-H/6-500 8 REX-H/6-560 9 REX-H/6-630 10 REX-H/6-710 11 REX-H/6-800

PERFORMANCE CHARACTERISTICS OF THE FANS

REX-H/2-190

Qmax:750m³/h, Δpmax:350Pa, Pnom:120W

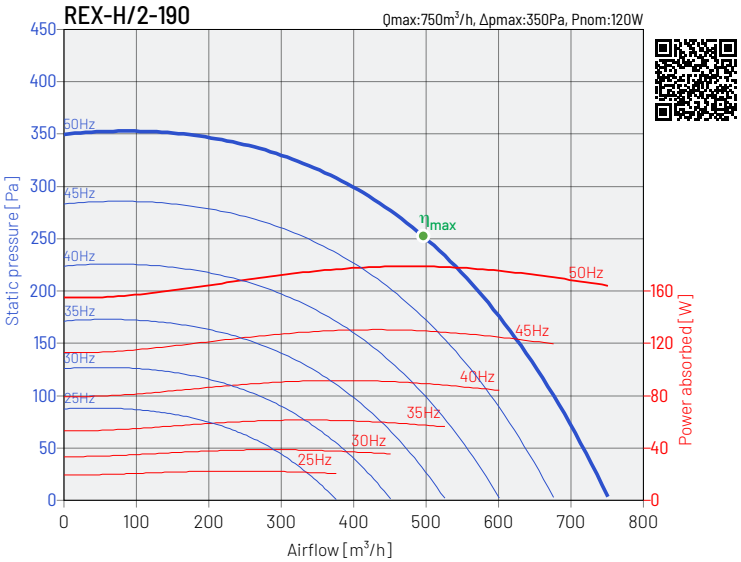

REX-H/2-220

Qmax:1050m³/h, Δpmax:450Pa, Pnom:180W

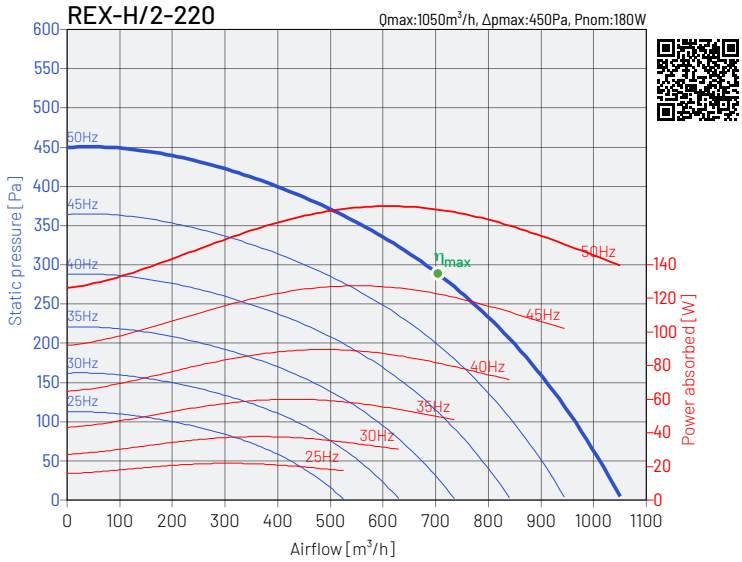

REX-H/2-280(250)

Qmax:1800m³/h, Δpmax:650Pa, Pnom:250W

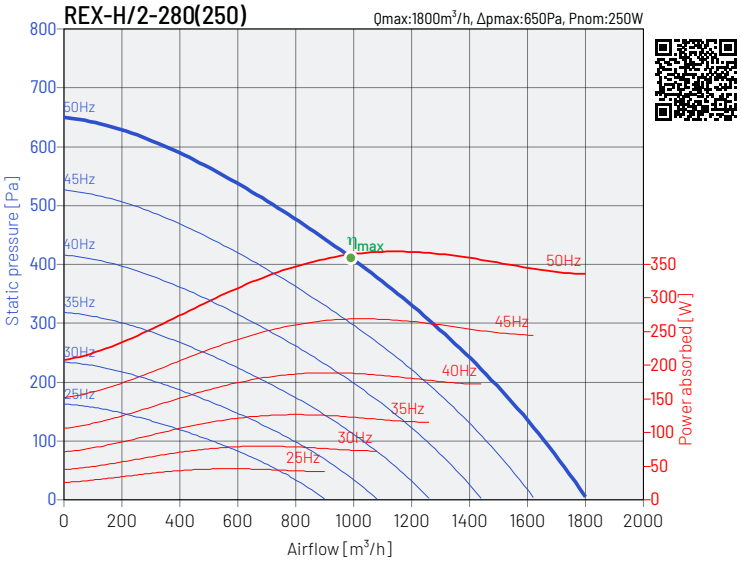

REX-H/4-190

Qmax:370m³/h, Δpmax:85Pa, Pnom:60W

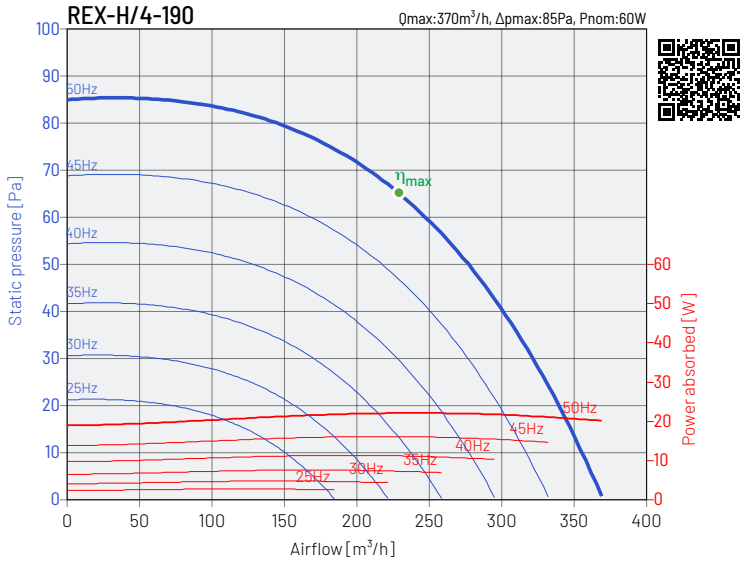

REX-H/4-220

Qmax:515m³/h, Δpmax:110Pa, Pnom:60W

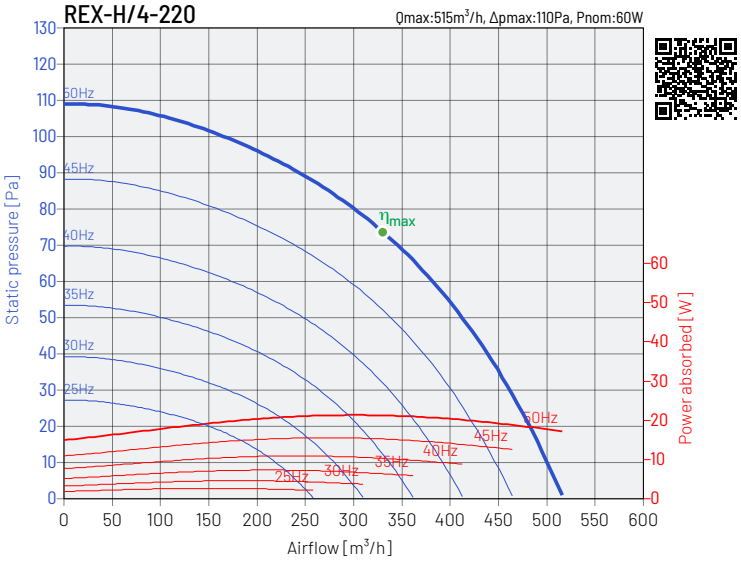

REX-H/4-250

Qmax:1140m³/h, Δpmax:185Pa, Pnom:180W

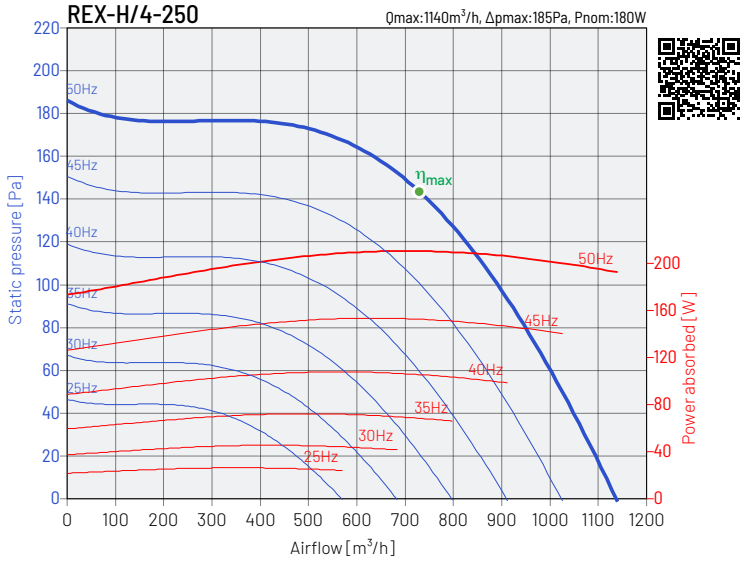

PERFORMANCE CHARACTERISTICS OF THE FANS

REX-H/4-280

Qmax:1615m³/h, Δpmax:235Pa, Pnom:250W

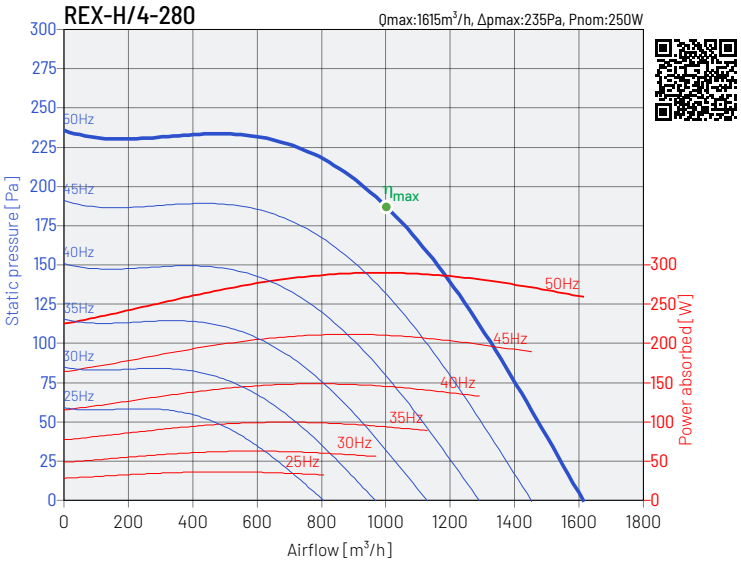

REX-H/4-315

Qmax:2280m³/h, Δpmax:300Pa, Pnom:370W

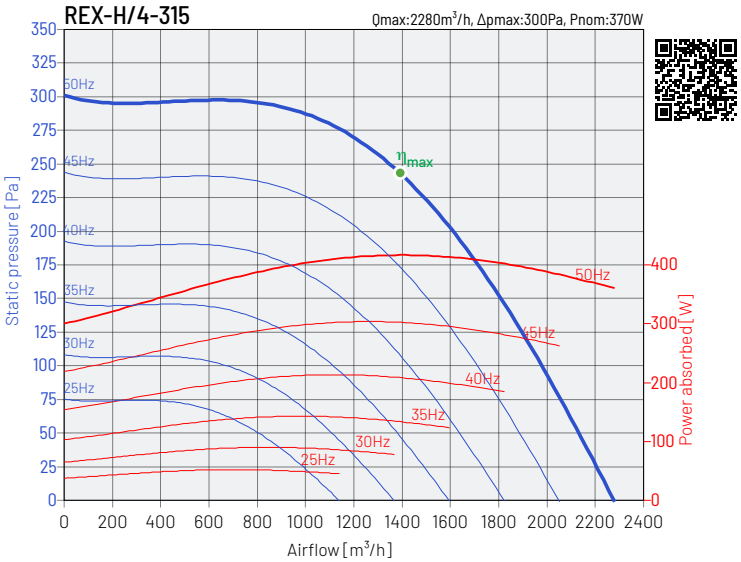

REX-H/4-355

Qmax:3230m³/h, Δpmax:385Pa, Pnom:0,55kW

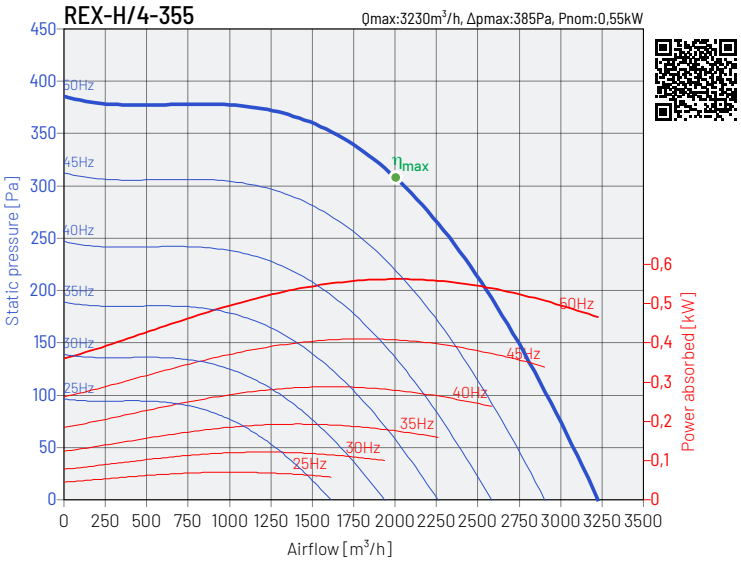

REX-H/4-400

Qmax:4750m³/h, Δpmax:490Pa, Pnom:0,75kW

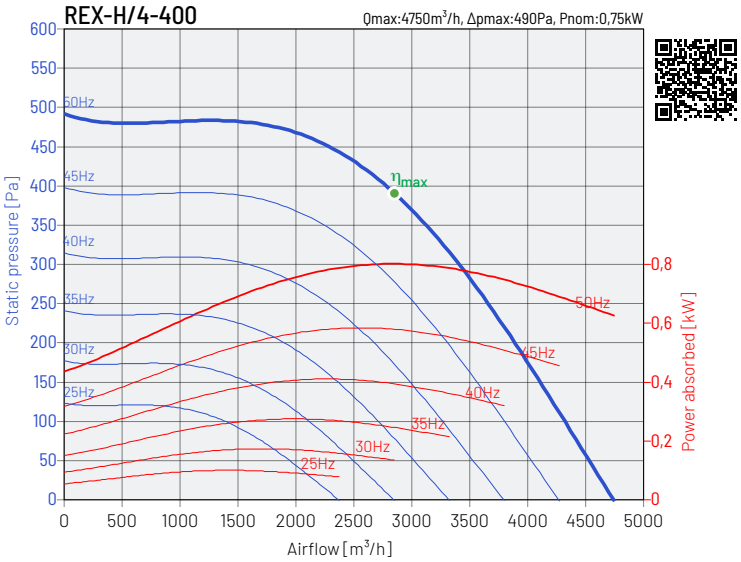

REX-H/4-450

Qmax:6745m³/h, Δpmax:640Pa, Pnom:1,1kW

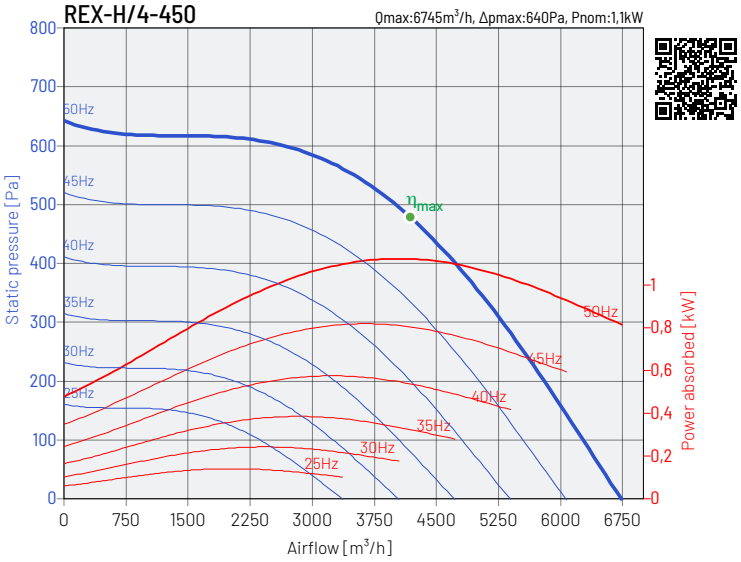

REX-H/4-500

Qmax:9215m³/h, Δpmax:765Pa, Pnom:2,2kW

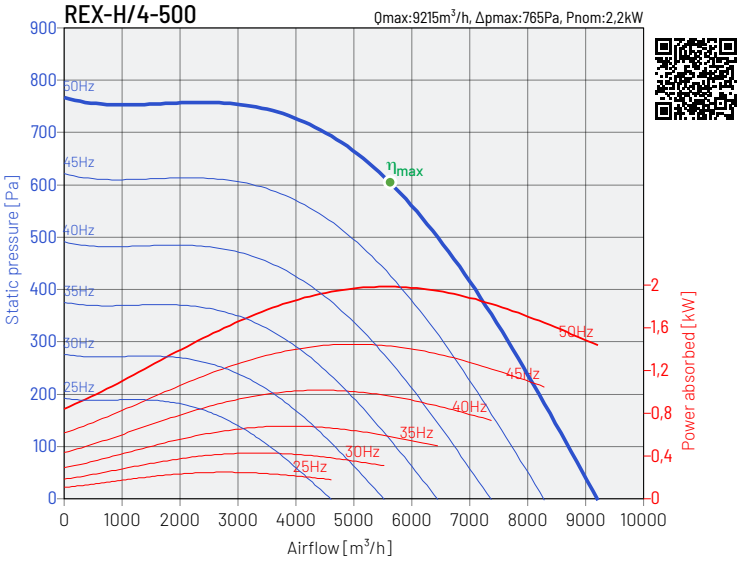

PERFORMANCE CHARACTERISTICS OF THE FANS

REX-H/4-560

Qmax:12900m³/h, Δpmax:950Pa, Pnom:3kW

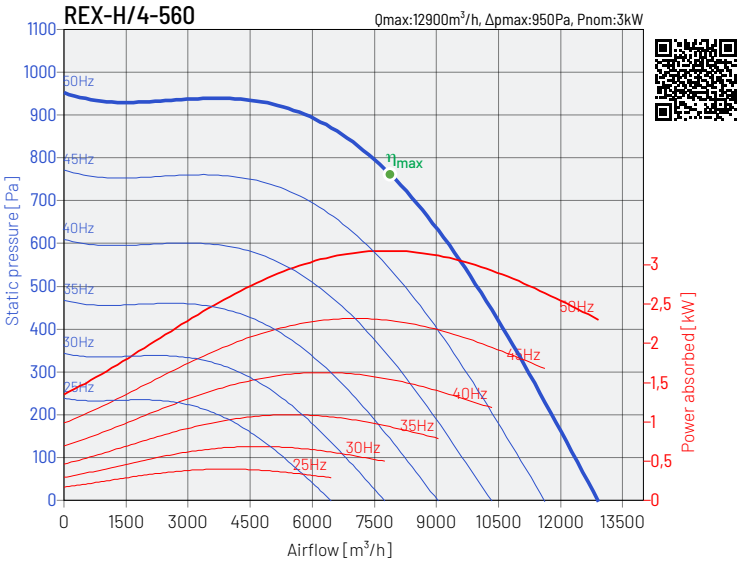

REX-H/6-250

Qmax:750m³/h, Δpmax:80Pa, Pnom:180W

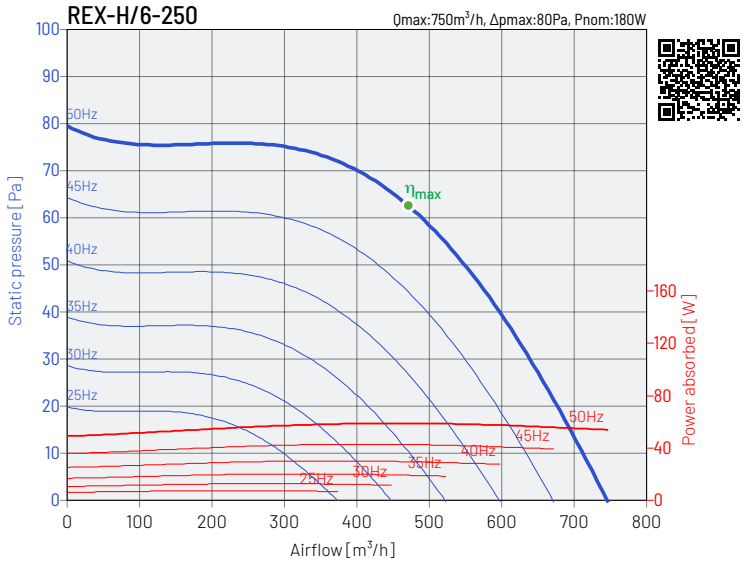

REX-H/6-280

Qmax:1060m³/h, Δpmax:100Pa, Pnom:180W

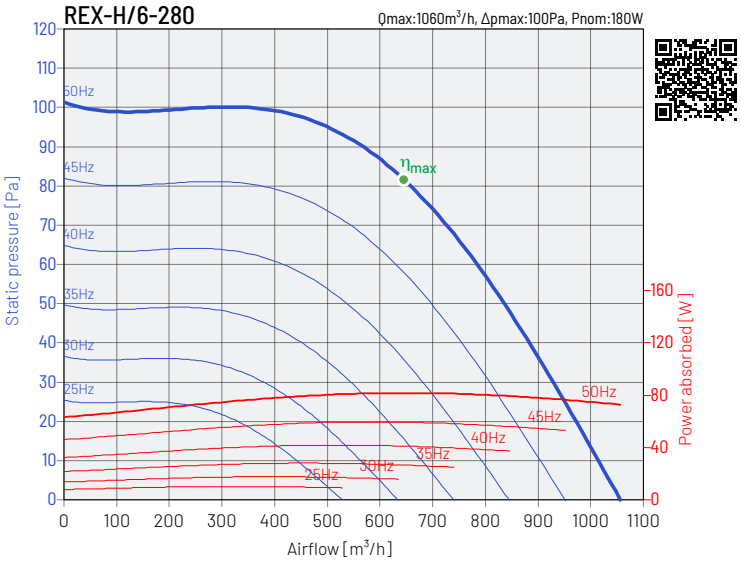

REX-H/6-315

Qmax:1500m³/h, Δpmax:130Pa, Pnom:180W

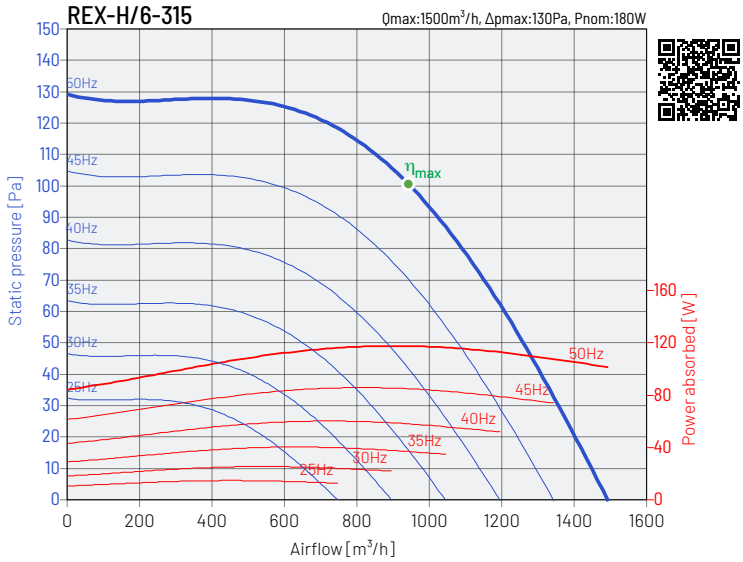

REX-H/6-355

Qmax:2115m³/h, Δpmax:165Pa, Pnom:180W

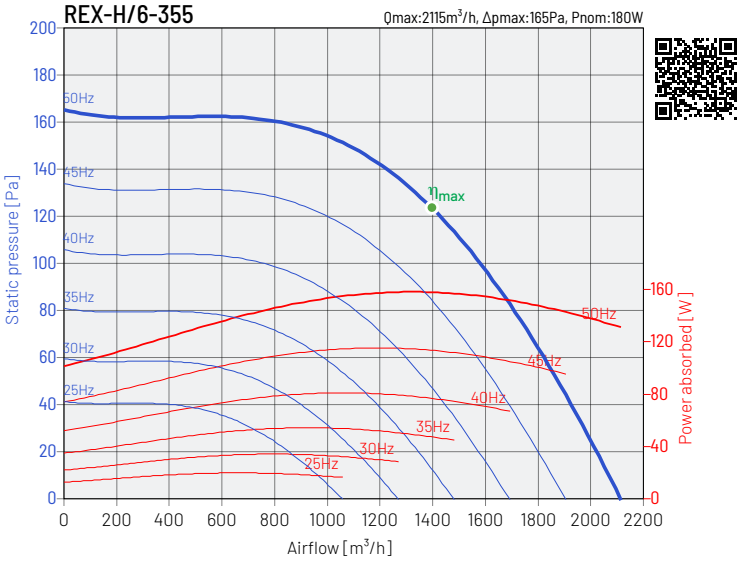

REX-H/6-400

Qmax:3110m³/h, Δpmax:210Pa, Pnom:250W

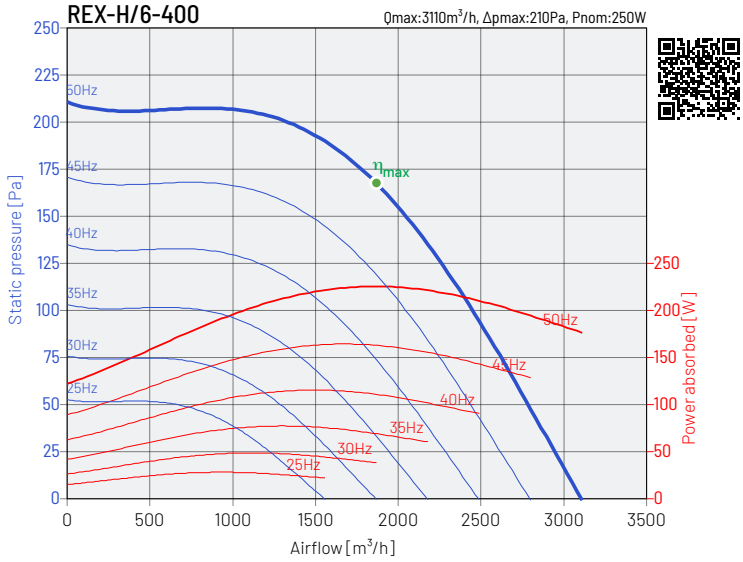

PERFORMANCE CHARACTERISTICS OF THE FANS

REX-H/6-450

Qmax:4420m³/h, Δpmax:275Pa, Pnom:370W

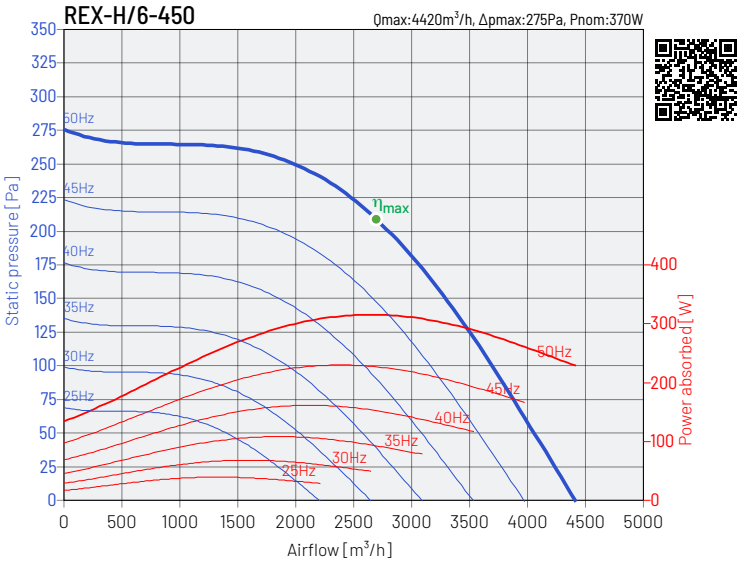

REX-H/6-500

Qmax:6030m³/h, Δpmax:330Pa, Pnom:0,75kW

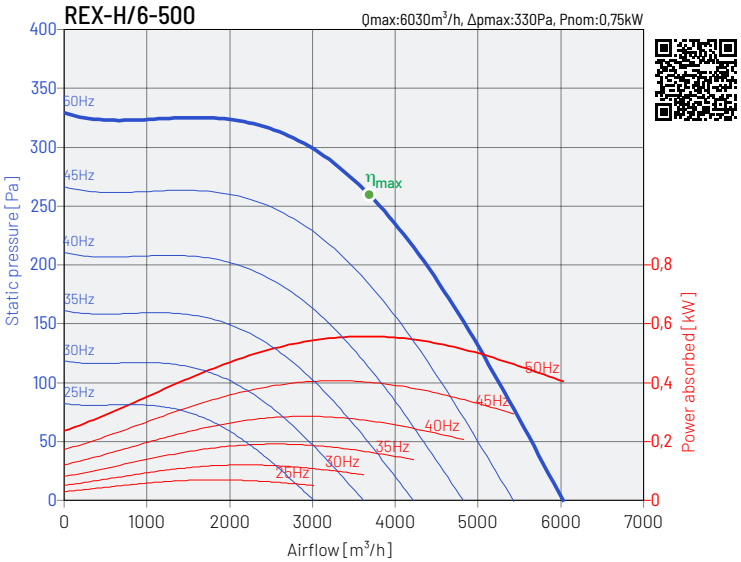

REX-H/6-560

Qmax:8465m³/h, Δpmax:410Pa, Pnom:1,1kW

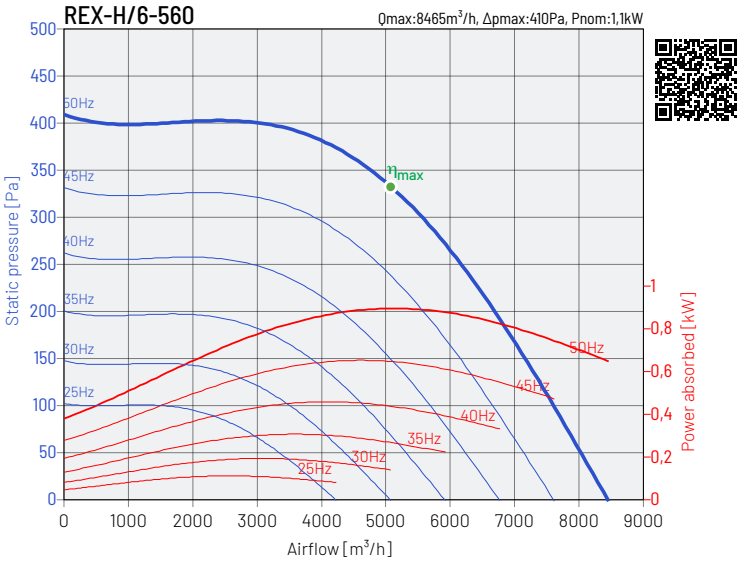

REX-H/6-630

Qmax:12250m³/h, Δpmax:535Pa, Pnom:2,2kW

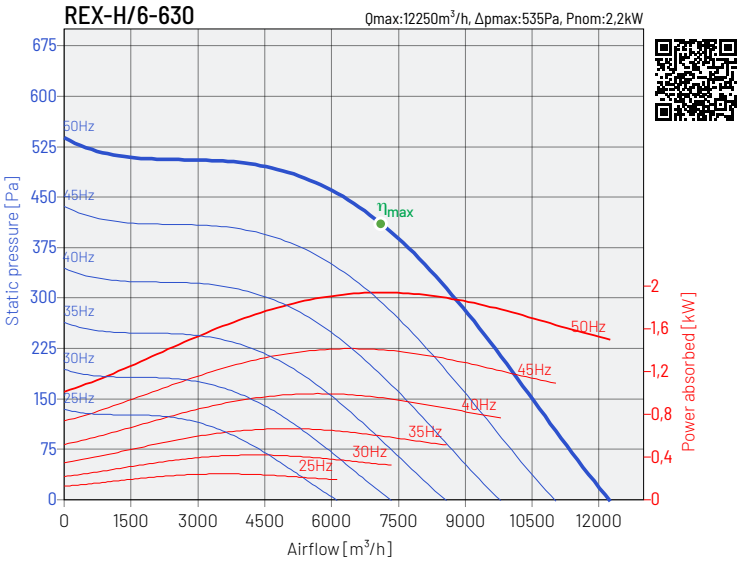

REX-H/6-710

Qmax:17480m³/h, Δpmax:680Pa, Pnom:3kW

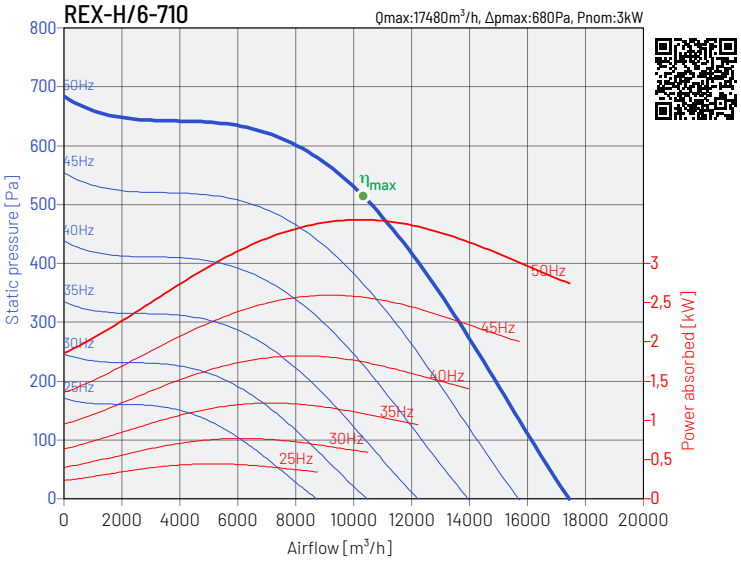

REX-H/6-800

Qmax:26000m³/h, Δpmax:900Pa, Pnom:5,5kW

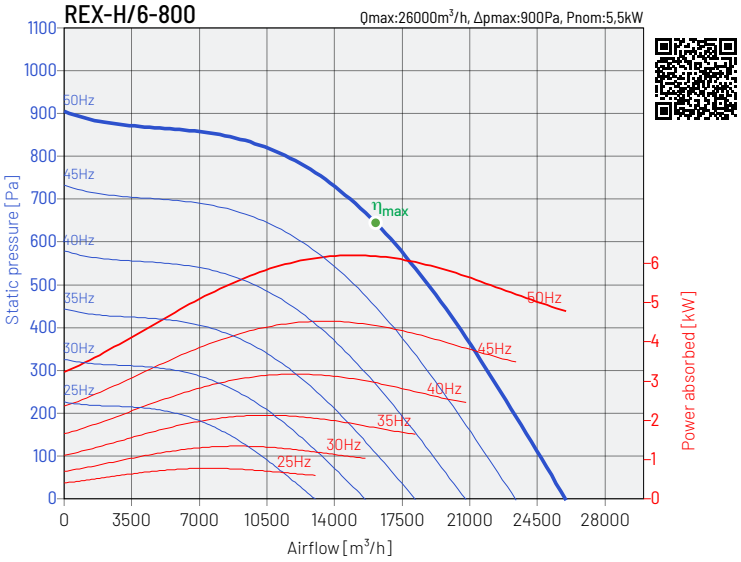

DIMENSIONS

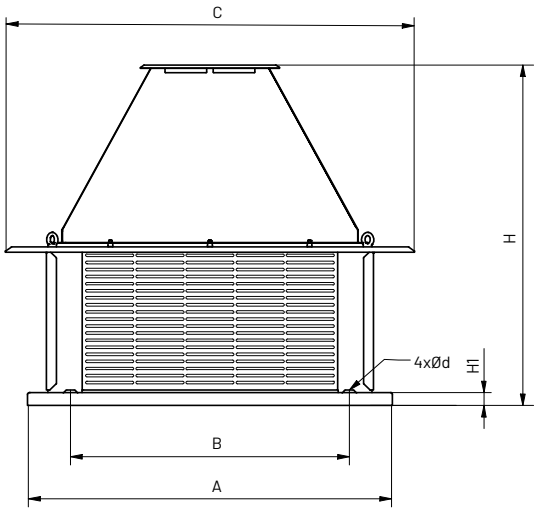

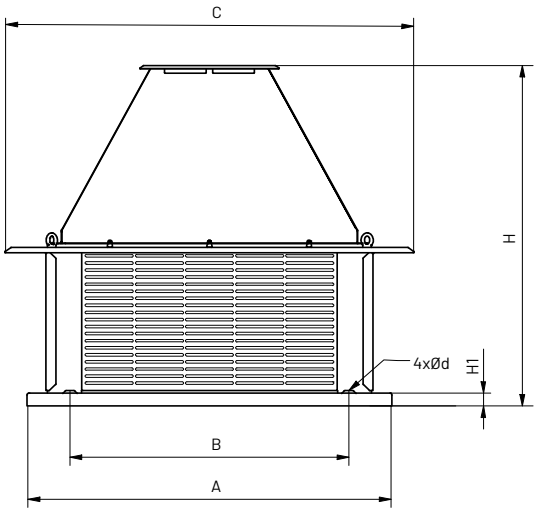

type	A mm	B mm	C mm	Ød mm	H mm	H1 mm
REX-x-190	435	330	386	12	385	15
REX-x-220	435	330	386	12	385	15
REX-x-250	435	330	441	12	459	15
REX-2-280	435	330	441	12	416	15
REX-4/6-280	435	330	441	12	464	15
REX-x-315	560	450	513	12	495	15
REX-x-355	560	450	583	12	540	15

type	A mm	B mm	C mm	Ød mm	H mm	H1 mm
REX-x-400	560	450	653	12	564	15
REX-x-450	710	590	731	12	603	15
REX-x-500	710	590	811	12	707	15
REX-x-560	710	590	896	12	781	15
REX-x-630	900	750	1001	14	816	40
REX-x-710	900	750	1121	14	885	40
REX-x-800	1100	840	1241	14	1060	40

MOUNTING ACCESSORIES

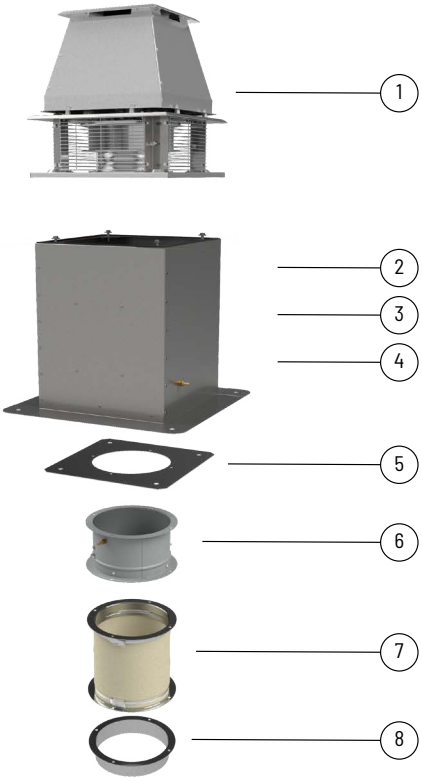

1	2	3	4	5
type	**flat roof up RSS/EX**	**flat roof up RS/EX**	**flat roof up RSA/EX**	**mounting plate P/EX**
REX-H/x-190	RSS/EX-435	RS/EX-435	RSA/EX-435	P/EX-435
REX-H/x-220	RSS/EX-435	RS/EX-435	RSA/EX-435	P/EX-435
REX-H/x-250	RSS/EX-435	RS/EX-435	RSA/EX-435	P/EX-435
REX-H/x-280	RSS/EX-435	RS/EX-435	RSA/EX-435	P/EX-435
REX-H/x-315	RSS/EX-560	RS/EX-560	RSA/EX-560	P/EX-560
REX-H/x-355	RSS/EX-560	RS/EX-560	RSA/EX-560	P/EX-560
REX-H/x-400	RSS/EX-560	RS/EX-560	RSA/EX-560	P/EX-560
REX-H/x-450	RSS/EX-710	RS/EX-710	RSA/EX-710	P/EX-710
REX-H/x-500	RSS/EX-710	RS/EX-710	RSA/EX-710	P/EX-710
REX-H/x-560	RSS/EX-710	RS/EX-710	RSA/EX-710	P/EX-710
REX-H/x-630	RSS/EX-900	RS/EX-900	RSA/EX-900	P/EX-900
REX-H/x-710	RSS/EX-900	RS/EX-900	RSA/EX-900	P/EX-900
REX-H/x-800	RSS/EX-1100	RS/EX-1100	RSA/EX-1100	P/EX-1100

1	6	7	8
type	**backflow preventer KZD/EX**	**zconnector anti-vibration ZPDO/EX**	**stub pipe K/EX**
REX-H/x-190	KZD/EX-435	ZPDO/EX-435	K/EX-435
REX-H/x-220	KZD/EX-435	ZPDO/EX-435	K/EX-435
REX-H/x-250	KZD/EX-435	ZPDO/EX-435	K/EX-435
REX-H/x-280	KZD/EX-435	ZPDO/EX-435	K/EX-435
REX-H/x-315	KZD/EX-560	ZPDO/EX-560	K/EX-560
REX-H/x-355	KZD/EX-560	ZPDO/EX-560	K/EX-560
REX-H/x-400	KZD/EX-560	ZPDO/EX-560	K/EX-560
REX-H/x-450	KZD/EX-710	ZPDO/EX-710	K/EX-710
REX-H/x-500	KZD/EX-710	ZPDO/EX-710	K/EX-710
REX-H/x-560	KZD/EX-710	ZPDO/EX-710	K/EX-710
REX-H/x-630	KZD/EX-900	ZPDO/EX-900	K/EX-900
REX-H/x-710	KZD/EX-900	ZPDO/EX-900	K/EX-900
REX-H/x-800	KZD/EX-1100	ZPDO/EX-1100	K/EX-1100

Article numbers

43527601 RSS/EX-435	**43527621** RSA/EX-435	**43527631** P/EX-435	**43527641** KZD/EX-435	**43527651** ZPDO/EX-435	**43527661** K/EX-435
43527602 RSS/EX-560	**43527622** RSA/EX-560	**43527632** P/EX-560	**43527642** KZD/EX-560	**43527652** ZPDO/EX-560	**43527662** K/EX-560
43527603 RSS/EX-710	**43527623** RSA/EX-710	**43527633** P/EX-710	**43527643** KZD/EX-710	**43527653** ZPDO/EX-710	**43527663** K/EX-710
43527604 RSS/EX-900	**43527624** RSA/EX-900	**43527634** P/EX-900	**43527644** KZD/EX-900	**43527654** ZPDO/EX-900	**43527664** K/EX-900
43527605 RSS/EX-1100	**43527625** RSA/EX-1100	**43527635** P/EX-1100	**43527645** KZD/EX-1100	**43527655** ZPDO/EX-1100	**43527665** K/EX-1100
43527611 RS/EX-435					
43527612 RS/EX-560					
43527613 RS/EX-710					
43527614 RS/EX-900					
43527615 RS/EX-1100					

ELECTRICAL ACCESSORIES

type	inverter L	switch PTC	service switch	contactor
2-POLE MOTORS 3000RPM				
REX-H/2-190-012T 2G	-	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/2-190-012T 2G VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/2-190-012T 2GD VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/2-220-018T 2G	-	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/2-220-018T 2G VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/2-220-018T 2GD VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/2-280(250)-025T 2G	-	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/2-280(250)-025T 2G VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/2-280(250)-025T 2GD VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
4-POLE MOTORS 1500RPM				
REX-H/4-190-006T 2G	-	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-190-012T 2G VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-190-012T 2GD VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-220-006T 2G	-	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-220-012T 2G VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-220-012T 2GD VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-250-018T 2G	-	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-250-018T 2G VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-250-018T 2GD VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-280-025T 2G	-	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-280-025T 2G VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-280-025T 2GD VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-315-037T 2G	-	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-315-037T 2G VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-315-037T 2GD VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-355-055T 2G	-	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-355-055T 2G VFD	L 0,75 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-355-055T 2GD VFD	L 0,75 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-400-075T 2G	-	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-400-075T 2G VFD	L 0,75 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-400-075T 2GD VFD	L 0,75 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-450-110T 2G	-	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-450-110T 2G VFD	L 1,5 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-450-110T 2GD VFD	L 1,5 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-500-220T 2G	-	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-500-220T 2G VFD	L 2,2 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-500-220T 2GD VFD	L 2,2 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-560-300T 2G	-	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-560-300T 2G VFD	L 3 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/4-560-300T 2GD VFD	L 3 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)

ELECTRICAL ACCESSORIES

type	inverter L	switch PTC	service switch	contactor
		6-POLE MOTORS 1000RPM		
REX-H/6-250-018T 2G	-	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-250-012T 2G VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-250-012T 2GD VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-280-018T 2G	-	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-280-012T 2G VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-280-012T 2GD VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-315-018T 2G	-	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-315-012T 2G VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-315-012T 2GD VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-355-018T 2G	-	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-355-018T 2G VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-355-018T 2GD VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-400-025T 2G	-	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-400-025T 2G VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-400-025T 2GD VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-450-037T 2G	-	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-450-037T 2G VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-450-037T 2GD VFD	L 0,4 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-500-075T 2G	-	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-500-075T 2G VFD	L 0,75 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-500-075T 2GD VFD	L 0,75 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-560-110T 2G	-	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-560-110T 2G VFD	L 1,5 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-560-110T 2GD VFD	L 1,5 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-630-220T 2G	-	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-630-220T 2G VFD	L 2,2 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-630-220T 2GD VFD	L 2,2 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-710-300T 2G	-	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-710-300T 2G VFD	L 4,0 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-710-300T 2GD VFD	L 4,0 kW	U-EK230	R-S 3-F + SP, 16A	DILM7-10(230V50HZ)
REX-H/6-800-550T 2G	-	U-EK230	R-S 3-F + SP, 25A	DILM12-10(230V50HZ)
REX-H/6-800-550T 2G VFD	L 5,5 kW	U-EK230	R-S 3-F + SP, 25A	DILM12-10(230V50HZ)
REX-H/6-800-550T 2GD VFD	L 5,5 kW	U-EK230	R-S 3-F + SP, 25A	DILM12-10(230V50HZ)

* equipment for the safe zone, execution for the ATEX zone consult with the Technical Department of Venture Industries Sp. z o.o.