

### APPLICATION

Used to prefilter the supply air. Separation of larger particles of pollutants contained in the air prolongs the service life of devices placed behind the filter - fans, heaters, etc.


### CONSTRUCTION

Channel filters designed for installation in circular ducts with standard diameters (100-400mm).


Housing made of galvanized sheet steel, rubber fitting seals, EU3 filter cartridge on profiled steel wire mesh.

On request, the device can be supplied in any colour from the RAL palette.

### CHARACTERISTICS OF PRESSURE LOSS

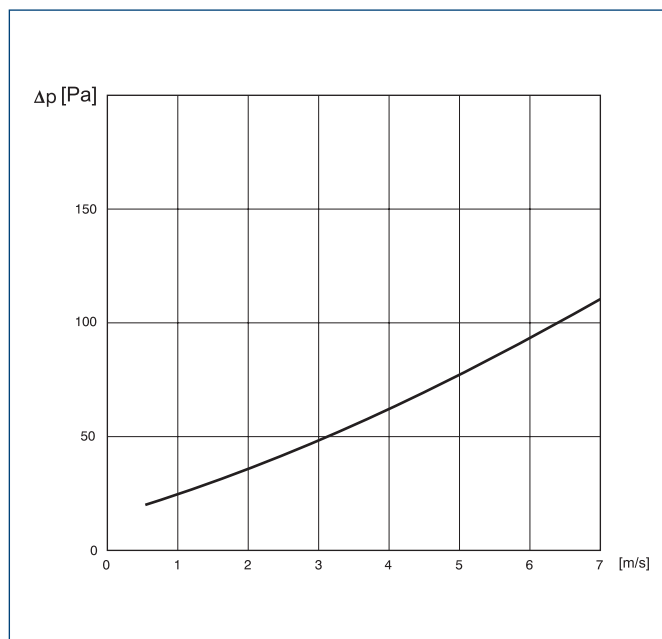

### DIMENSIONS [mm]

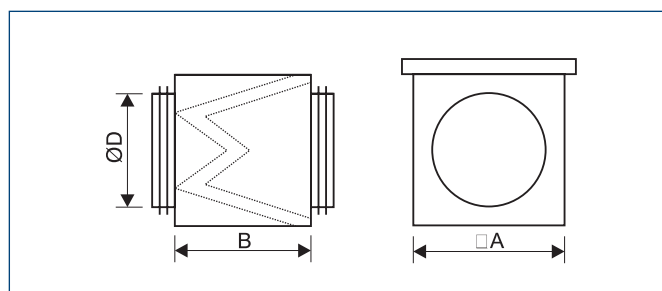

Type	A	B	ØD	article number
DF 100	180	180	100	40520610
DF 125	180	180	125	40520620
DF 160	210	180	160	40520630
DF 200	250	180	200	40520640
DF 250	300	180	250	40520650
DF 315	360	180	315	40520660
DF 355	400	180	355	40520670
DF 400	450	180	400	40520675